



AXEON Inline Flow Meters have an easy-to-read scale which has been silk screened onto an acrylic body. These flow meters offer durability, accuracy and high quality. AXEON Inline Flow Meters are offered in 1-10 , 2-20, 4-40 and 6-60 gallon per minute configurations.

Features

- Solid One Piece Injection Molded Acrylic Body
- Stainless Steel Float and Internals
- Permanent Screen Printed Scales
- Calibrations in GPM and LPM
- Individually Packaged
- 100% Tested for Accuracy

Technical Specifications

- Body: Acrylic
- O-Rings: Silicone
- Connections: Polypropylene
- Guide: 316 Stainless Steel
- Float: Stainless Steel
- Maximum Pressure: 150 psi
- Temperature Rating: 120°F
- Accuracy: ± 4%

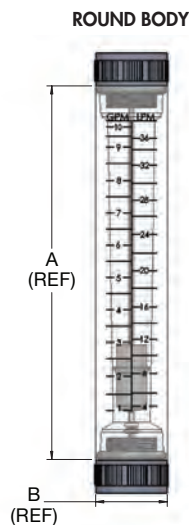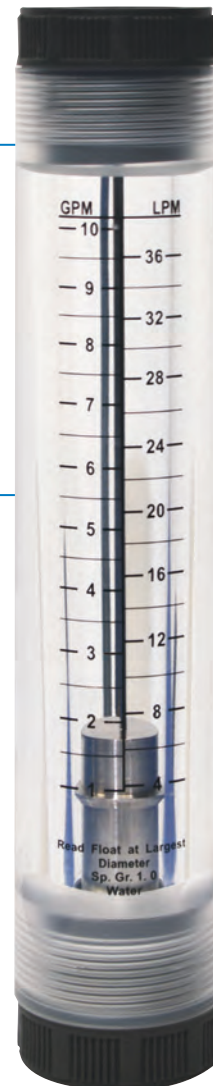

AXEON Standard Inline Flow Meters					
Part Number	Range/ Capacity	Connection Size	Dimension		Body Type
			Ref A	Ref B	
204246	1 – 10	1" x 1" FNPT	9.25"	1.75"	Round
204271	2 – 20	1" x 1" FNPT	9.25"	1.75"	Round
204272	4 – 40	1 1/2" x 1 1/2" FNPT	9.00"	2.67"	Round
204273	6 – 60	1 1/2" x 1 1/2" FNPT	9.00"	2.67"	Round

Engineered Water Treatment Solutions