

HARMSCO®

Premium Hurricane® Harmsco-Free Cartridges

Cellulose Free Media

Designed for Hurricane® and WaterBetter® Filter Housings

High Flow Performance

Lower Operation Cost with Hurricane® Cartridges

- High flow capability
- Lower overall operating cost
- Reduced waste disposal
- Longer filter runs for fewer change-outs
- Increased contaminant removal
- Operator friendly



Certified to
ANSI-NSF 61

Features

- ▶ Fewer cartridges for fewer change-outs and lower maintenance cost
- ▶ Pleated synthetic composite filter media provides higher flow rates and lower initial pressure drop
- ▶ Pleated surface area provides higher loading capacity for longer filter life and increased particle removal
- ▶ End cap, center tube and media are thermally bonded as one integral component for added strength
- ▶ Offered in three sizes (40, 90 and 170) and three micron ratings (1, 5, 20) to meet all your high flow requirements



Premium Hurricane®
Harmsco-Free Cartridges

Applications

- ▶ Reverse Osmosis Pre-filtration
- ▶ Municipal Drinking Water Filtration
- ▶ Commercial/Residential Drinking Water Filtration
- ▶ Desalination Pre-filtration
- ▶ Industrial Water Filtration
- ▶ Cooling Tower Filtration
- ▶ Chill Water Loop Filtration
- ▶ Food & Beverage Filtration
- ▶ Marine/Aquatic Filtration
- ▶ Water Bottlers



HARMSCO® Filtration Products



Made in USA

Premium Hurricane® Harmsco-Free Cartridges

Specifications

- ▶ **Micron Ratings:** Nominal micron ratings of 1, 5 and 20
- ▶ **Center Tubes:** ABS or PVC
- ▶ **End Caps:** Pliable PVC with sealing surface built-in
- ▶ **Filter Media:** 100% cellulose-free synthetic composite media
- ▶ **Temperature:** 140°F (60°C) temperature limit*
* Temperature limits vary and depend on pressure and time under load.

Cleanable/Reusable in most filtration applications and micron ratings.



Certified to ANSI-NSF 61

Cartridge Selection/Sizing Guide


7-3/4" O.D. For Harmsco® Hurricane® and WaterBetter® Single-cartridge Filter Housings

Product Code	Nominal Micron Rating	Media (sq ft)	Recommended Flow Rate* (GPM)	Max Flow Rate* (GPM)	Max Flow Rate* (LPM)	Max Flow Rate* (M ³ /HR)	No./ Case	Carton Size
Harmsco-Free - 100% cellulose-free synthetic composite media.								
HC/40-1W-HF	1	30	35	50	189	12	1	9x9x11
HC/40-5W-HF	5	30	35	50	189	12	1	9x9x11
HC/40-20W-HF	20	30	35	50	189	12	1	9x9x11
HC/90-1W-HF	1	70	70	100	378	24	1	9x9x21
HC/90-5W-HF	5	70	70	100	378	24	1	9x9x21
HC/90-20W-HF	20	70	70	100	378	24	1	9x9x21
HC/170-1W-HF	1	120	105	150	568	36	1	9x9x32
HC/170-5W-HF	5	120	105	150	568	36	1	9x9x32
HC/170-20W-HF	20	120	105	150	568	36	1	9x9x32

9-5/8"

19-1/2"

30-3/4"

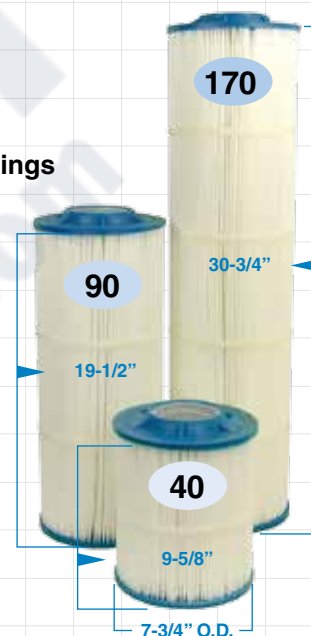


Premium Hurricane® Harmsco-Free Cartridges
Length and O.D.

*Harmsco® recommends operation at 70% of maximum flow rate for optimum performance.

Pressure Drop

Pressure drop shown at right is for filter housing and 20 micron filter cartridge in clean water.

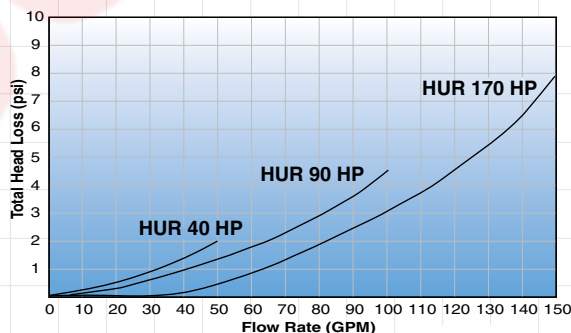

Note: This publication is to be used as a guide. The data within has been obtained from many sources and is considered to be accurate. Harmsco does not assume liability for the accuracy and/or completeness of this data. Changes to the data can be made without notification. Temperature, Pressure, Flow Rates, Differential Pressures, Chemical Combinations and other unknown factors can affect performance in unknown ways. **Limited Warranty:** Harmsco warrants their products to be free of material and workmanship defects. Determination of suitability of Harmsco products for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. The end user/installer/buyer shall be liable for the product's performance and suitability regarding their specific intended applications. End users should perform their own tests to determine suitability for each application.



HARMSCO® Filtration Products

P.O. Box 14066, North Palm Beach, FL 33408

(561) 848-9628 • Toll-free: (800) 327-3248 • Fax: (561) 845-2474 • E-mail: sales@harmsco.com

www.harmsco.com



Made in USA

© Harmsco, Inc. 38C 2/11